

TECHNICAL INFORMATION

Product Name : Interior Film


1. Production Description

Embossed PVC film or PET glitter film and Permanent adhesive designed for indoor use as wall or furniture covering. For use in residential, medical, hotel, restaurant, retail and other commercial spaces.

2. Application

Indoor Decoration, Remodeling Interior.

3. Standard Film Sectional Diagram

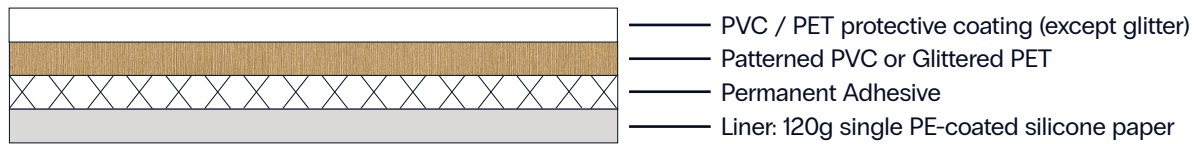

4. Performance & Physical Data

- Surface finish: Various patterns, depending on reference
- Thickness (film only): $\pm 200\mu\text{m}$ according to the patterns and embossing
- Tensile strength: 60 N/10mm (length, KST 1028 : 2009)
35 N/10mm (width, KST 1028 : 2009)
- Elongation: 220% (length, KST 1028 : 2009)
110% (width, KST 1028 : 2009)
- Application temperature: 12° to 38° (on clean and dry surfaces)
- Service temperature: -15° to 70°
- Dimensional stability: max. 2mm shrinkage (70° x 48hr)
- Release paper: Single PE coated paper 120g
- Roll size: 1220mm X 50m - 1220mm X 30m (glittered references) or 1000mm x 25m (mirror)
- Adhesive: Clear Permanent /Acrylic with air release system (except MIB1)
- Adhesive strength: 8.0N/10mm (KST 1028 : 2009)

5. Storage

- Shelf life: Install the product within 1 year of reception.
- Storage: Store in original packaging at a temperature of 15° to 30° and humidity range of 45% to 60%, away from direct sunlight and humidity.

6. Remarks and Sales Conditions

The technical information and statements made by Cover Styl are based on tests, the accuracy is not guaranteed. The seller and manufacturer are only liable for the identified and proven defective quantities. All material should be tested by the purchaser to determine final suitability.

7. Before Applying the Vinyl

- Dry for at least 2 days after printing it prior to application.
- Avoid any factor like dust, dirty, humid etc., from the application surface & affecting its quality.
- Test the vinyl before actual application to obtain a guaranteed level of quality.
- Use primer adhesive before installation.

8. References

SCB1	SCB6	WOB4	MAB2	NSB1	NSB6
SCB2	SCB7	WOB5	MIB1	NSB2	NSB7
SCB3	WOB1	WOB6	FAB1	NSB3	NSB8
SCB4	WOB2	WOB7	FAB2	NSB4	GLB1
SCB5	WOB3	MAB1	FAB3	NSB5	GLB2